

# ATTACHMENT 7

Daniel L. Goulet  
 C Squared Systems, LLC  
 65 Dartmouth Drive  
 Auburn, NH 03032  
 603-644-2800  
 Dan.Goulet@csquaredsystems.com



June 2, 2014

Connecticut Siting Council

Subject: New Cingular Wireless PCS, LLC (“AT&T”) – S3411 – 541 Griswold Street, Glastonbury, CT

Dear Connecticut Siting Council:

C Squared Systems has been retained by New Cingular Wireless PCS, LLC (“AT&T”) to investigate RF Power Density levels for the AT&T antenna arrays, to be installed on the proposed monopole tower, to be located at 541 Griswold Street in Glastonbury, CT.

Calculations were done in accordance with FCC OET Bulletin 65. These worst-case calculations assume that all transmitters are simultaneously operating at full power and that there is 0 dB of cable loss. The calculation point is 6 feet above ground level to model the RF power density at the head of a person standing at the base of the tower.

Due to the directional nature of the proposed AT&T antennas, the majority of the RF power is focused out towards the horizon. As a result, there will be less RF power directed below the antennas relative to the horizon, and consequently lower power density levels around the base of the tower. Please refer to the Attachment for the vertical patterns of the proposed AT&T antennas. The calculated results below include a nominal 10 dB off-beam pattern loss to account for the lower relative gain directly below the antennas.

Location	Carrier	Vertical Distance to Antenna (Ft.)	Operating Frequency (MHz)	Number of Trans.	Effective Radiated Power (ERP) Per Transmitter (Watts)	Power Density (mw/cm <sup>2</sup> )	Limit	%MPE
Ground Level	AT&T UMTS	116	880	1	1028	0.0031	0.5867	0.52%
	AT&T UMTS	116	1900	1	1265	0.0038	1.0000	0.38%
	AT&T LTE	116	710	2	1254	0.0075	0.4733	1.58%
	AT&T LTE	116	880	1	1542	0.0046	0.5867	0.78%
	AT&T LTE	116	1900	3	1897	0.0169	1.0000	1.69%
	AT&T LTE	116	2300	1	2179	0.0065	1.0000	0.65%
<b>Total</b>								<b>5.59%</b>

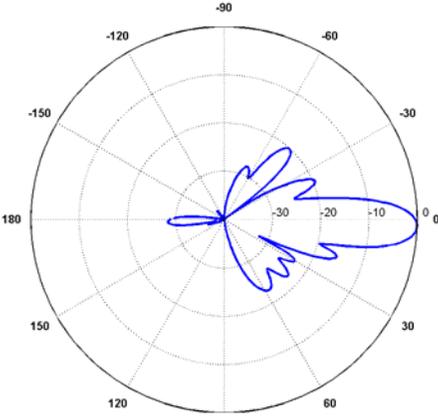
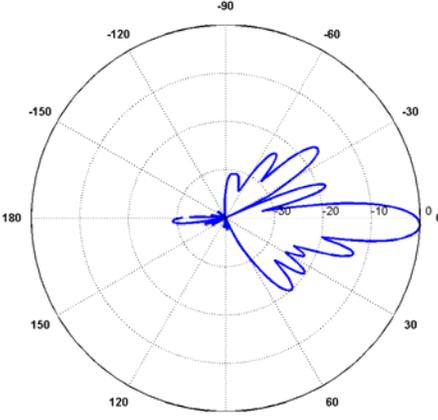
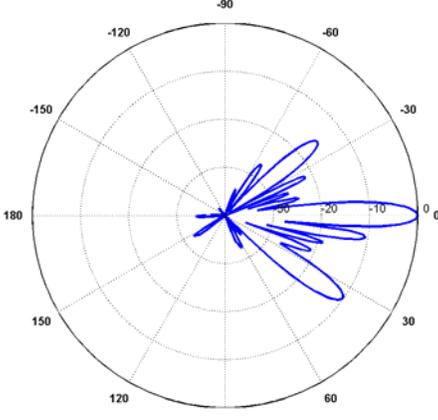
**Summary:** Under worst-case assumptions, RF Power Density levels for the proposed AT&T antenna arrays will not exceed **5.59%**<sup>1</sup> of the FCC MPE limit for General Public/Uncontrolled Environments.

Sincerely,

Daniel L. Goulet  
 C Squared Systems, LLC

<sup>1</sup> The total %MPE is a summation of each unrounded contribution. Therefore, summing each rounded value may not reflect the total value listed in the table.

**Attachment: AT&T's Antenna Data Sheets and Electrical Patterns**

<p><b>750 MHz</b></p> <p>Manufacturer: CCI Products            Model #: HPA-65R-BUU-H8            Frequency Band: 698-806 MHz            Gain: 13.2 dBd            Vertical Beamwidth: 10.1°            Horizontal Beamwidth: 65°            Polarization: Dual Pol ± 45°            Size L x W x D: 92.4" x 14.8" x 7.4"</p>	
<p><b>850 MHz</b></p> <p>Manufacturer: CCI Products            Model #: HPA-65R-BUU-H8            Frequency Band: 824-894 MHz            Gain: 14.1 dBd            Vertical Beamwidth: 8.4°            Horizontal Beamwidth: 61°            Polarization: Dual Pol ± 45°            Size L x W x D: 92.4" x 14.8" x 7.4"</p>	
<p><b>1900 MHz</b></p> <p>Manufacturer: CCI Products            Model #: HPA-65R-BUU-H8            Frequency Band: 1850-1990 MHz            Gain: 15.0 dBd            Vertical Beamwidth: 5.6°            Horizontal Beamwidth: 62°            Polarization: Dual Pol ± 45°            Size L x W x D: 92.4" x 14.8" x 7.4"</p>	

**2300 MHz**

Manufacturer: CCI Products  
Model #: HPA-65R-BUU-H8  
Frequency Band: 2305-2360 MHz  
Gain: 15.6 dBd  
Vertical Beamwidth: 4.5°  
Horizontal Beamwidth: 60°  
Polarization: Dual Pol ± 45°  
Size L x W x D: 92.4" x 14.8" x 7.4"

